


Knurling system TSW10

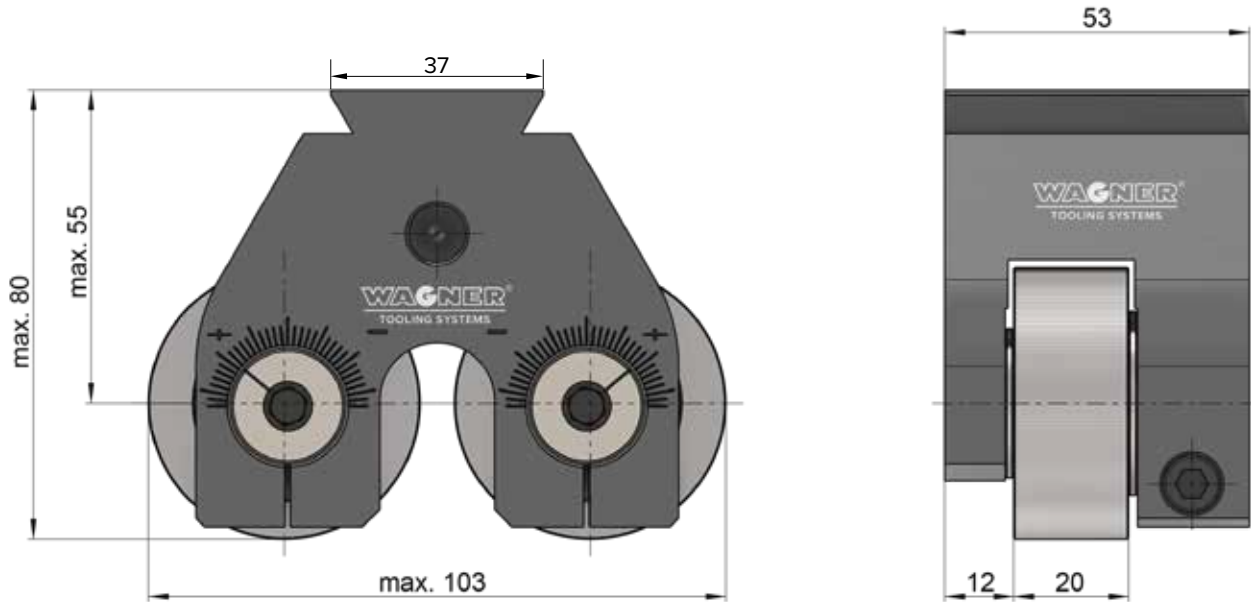


Knurling system TSW10

Weight with rolls	1.9 kg
Weight adapter	2.0–3.0 kg

	mm	inch
Working range \varnothing	3–18	0.118–0.709
Roll width max.	20	0.787

Knurling system TSW18

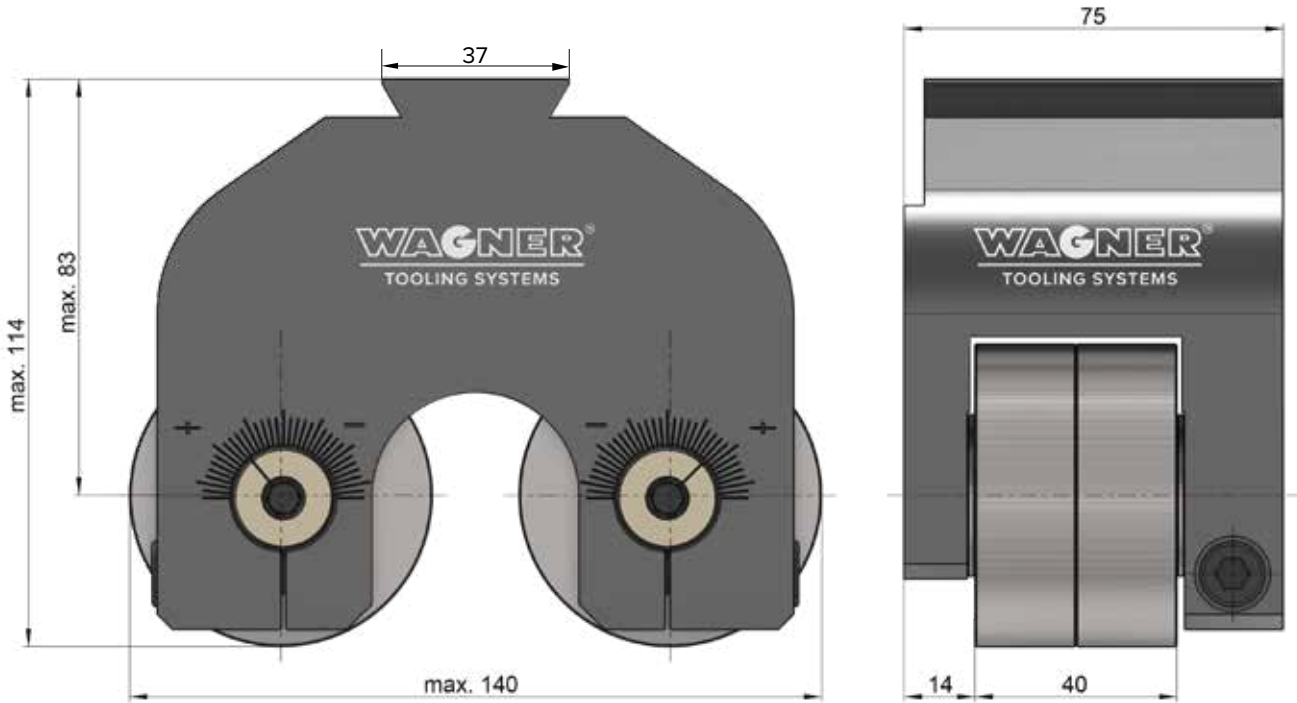


Knurling system TSW18

Weight with rolls	5.9 kg
Weight adapter	3.0–5.0 kg

	mm	inch
Working range \varnothing	14–36	0.551–1.417
Roll width max.	40	1.575

Knurling system TSW24

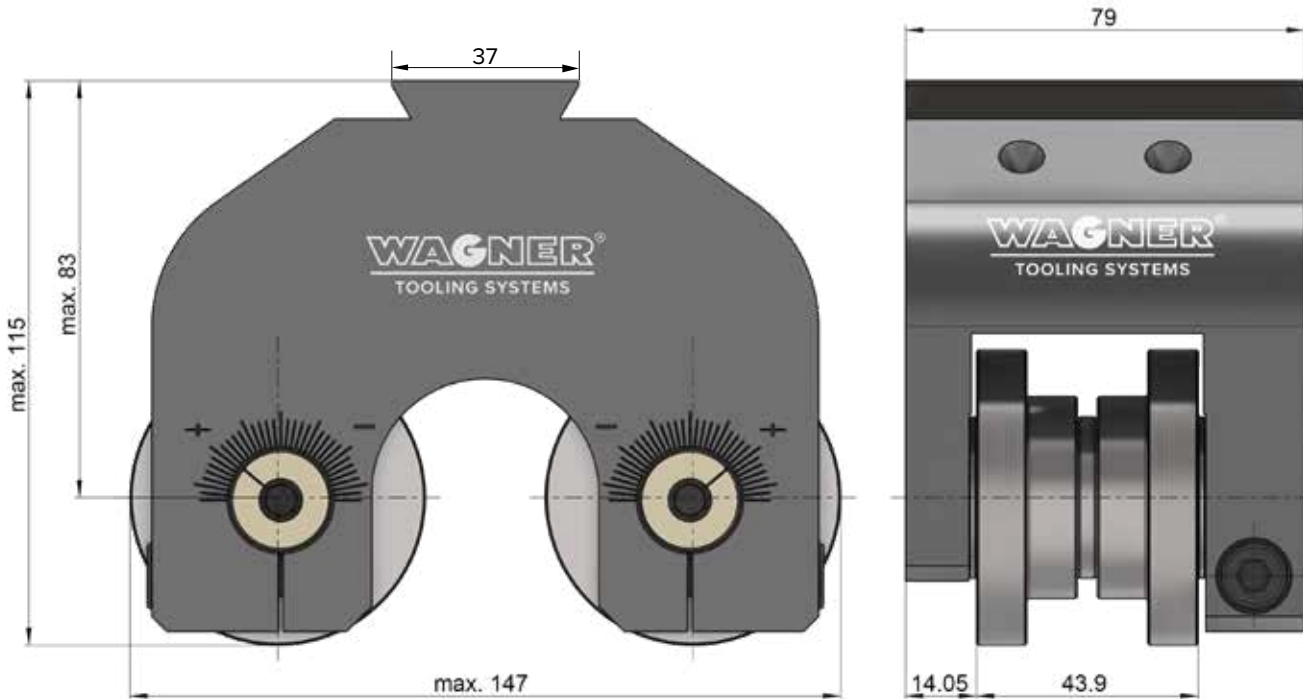


Knurling system TSW24

Weight with rolls	6.1 kg
Weight adapter	3.0–5.0 kg

	mm	inch
Working range \varnothing	18–40	0.709–1.575
Roll width max.	43.9	1.728

Knurling system TSW24-SR

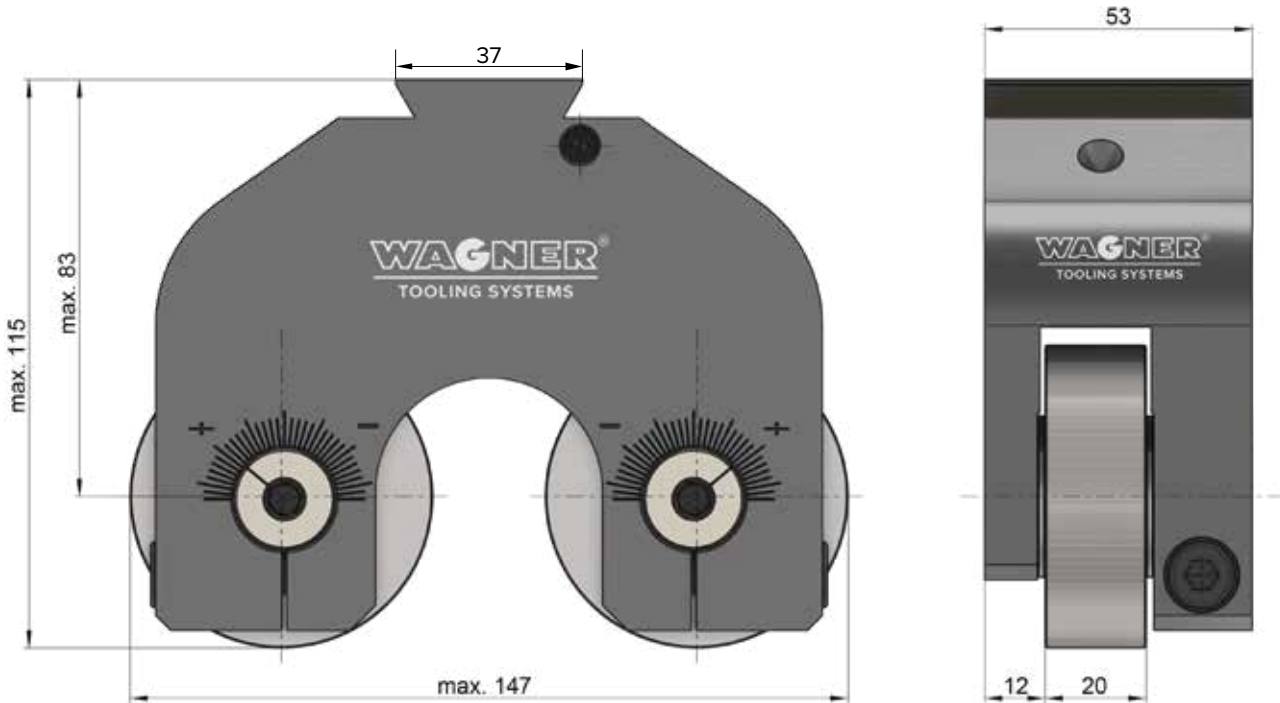

Knurling system TSW24-SR

Weight with rolls	4.1 kg
Weight adapter	3.0–5.0 kg

	mm	inch
Working range \varnothing	18–40	0.709–1.575
Roll width max.	20	0.787